


RTD Extension wire Type RTD-FG/FG/SSB -3×26AWG

Description:

This specification covers the requirements for FB insulated, FB sheathed and stainless steel braid RTD extension cable, 3×7/0.15mm, strand wire, twisted construction.

TECHNICAL FEATURES

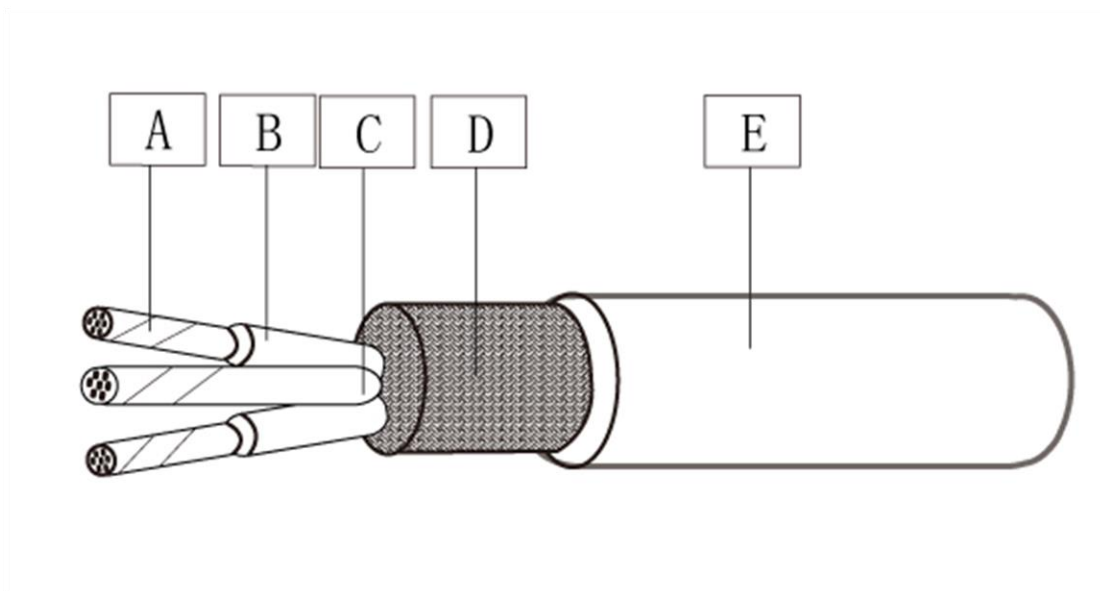

A. Conductors:

Stranded RTD extension wire

Conductor	Conductors Size(AWG)	NO.of Strands & Gauge
Copper or Nickel	26	7/0.15mm

B. Insulation:

Braided fiberglass (400°C)

Nominal Insulation Thickness	0.45mm±0.2mm
Color code	Red/ Red/White (2 cores red and 1 core white)

C. Assembly:

Three conductors (cores) twisted construction.

D. Overall Jacket

Braided fiberglass (400°C)

Nominal Sheath Thickness	0.25mm±0.2
Color code	white

E. Metal Overbraid

Stainless steel round wire braid, 85% minimum coverage

3, DIMENSIONS AND TOLERANCES

Dimensions/tolerances(mm)	Ø3.0±0.25
----------------------------------	-----------